


**FISCAL YEAR END SUPER SALE
IMMEDIATE DELIVERY!**

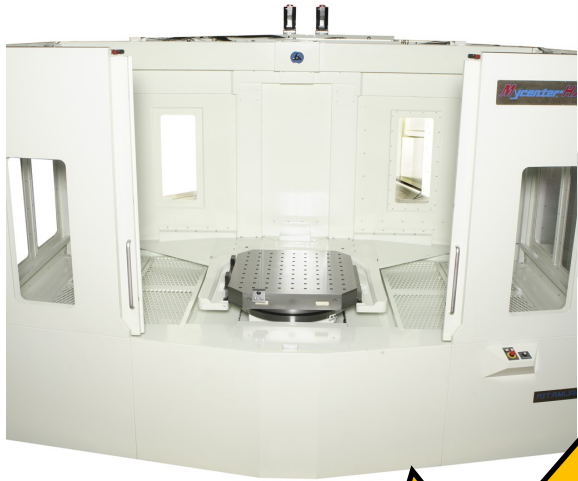

HX1000i – HMC – Solid Box Ways/High Accuracy

Max Work Size (80.71" x 61.02) Dia. X Height

#50, 8,000rpm, 4-Step Geared Spindle, 150T ATC

Fanuc 30iB Control

**SPECIAL FACTORY
PRICE PROMOTION –
LIMITED STOCK
QUANTITIES
AVAILABLE**



Mycenter-HX800iLTGA – Solid Box Ways/Craftmanship in Handscraping

HUGE WORK ENVELOPE – 59.1" x 59.1 (Dia. X Height)



50T (Upgradable in the field), 8k and 12k Geared Spindles Available

Fanuc 30iB Control

KITAMURA QUALITY • HAND CRAFTED IN JAPAN

6-8 WEEKS ARO LEAD TIME!

Positioning Accuracy +/-0.000079"/Full Stroke

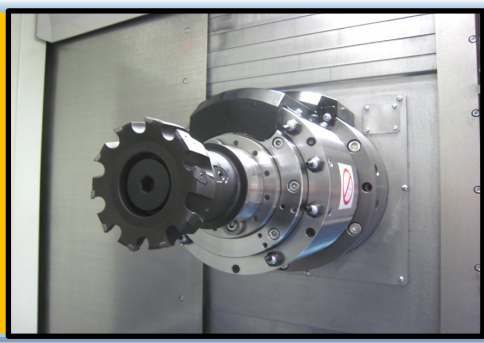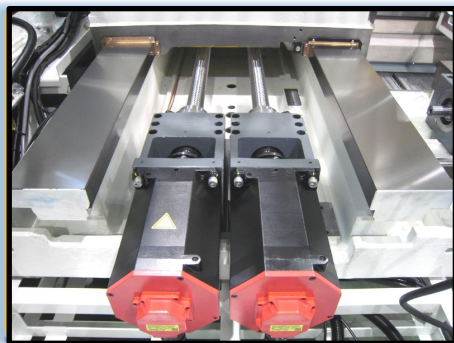

	<u>SPECIFICATIONS</u>	Mycenter-HX800iLTGA		Mycenter-HX1000
Table	Table Size Maximum Table Load Max. Work Piece Diameter Max. Work Piece Height	800 x 800mm (31.5" x 31.5") 2000kg (4,400Lbs.) Ø1,500mm (Ø59.1") 1,500mm (59.1")		1,000 x 1,000 (39.4" x 39.4") 3,000kg (6,600Lbs.) Ø2,050mm (Ø80.7") 1,550mm (61.0")
Travels	X-Axis Travel Y-Axis Travel Z-Axis Travel B-Axis Travel	1,400mm (55.1") 1,250mm (49.2") 1,325mm (52.2") 0-360°/Full 4 th Axis Scales on all Axes (X,Y,Z,4th)		2,040mm (80.3") 1,350mm (53.1") 1,370mm (53.9") 0-360°/Full 4 th Axis Scales on all Axes (X,Y,Z,4th)
Spindle	Spindle Taper	NST #50		NST #50
	Spindle Speed	12,000min ⁻¹	8,000min ⁻¹ Opt.	8,000min ⁻¹
	Drive Method	4-Step Gear Driven		
	Spindle Motor 15 min/Cont.	30kw (40HP)/22kw (30HP)		
Feed	Rapid Feed X, Y, Z Cutting Feed Rate X, Y, Z Rapid Feed (B Axis)	50m/min (1,969ipm) 50m/min (1,969ipm) 8,000 deg./min (22.2min⁻¹)		36m/min (1,417ipm) 36m/min (1,417ipm) 4,000 deg./min (11.1 min ⁻¹)
APC	Number of Pallets	2 APC		2 APC
ATC	Tool Storage Capacity	50T (100,150,200 Opt.)		150T Standard
	Tool Selection Method	Random bi-Directional, Fixed Pot		Random bi-Directional, Fixed Pot
	Tool Holder Style	CT (BT) 50		CT (BT) 50
	Max. Tool Dia.	Ø125mm (Ø4.9")		Ø125mm (Ø4.9")
	With Adjacent Pots Empty	Ø320mm (Ø12.6")		Ø300mm (Ø11.81")
	Max. Tool Length	600mm (23.6")		650mm (25.59")
	Max. Tool Weight	30kg (66 Lbs.)		30kg (66 Lbs.)
Tool Change Time (T-T)	4.3 Seconds		5.0 Seconds	
Control	FANUC 30iB			

